

Commercial Bare Unjacketed Energy Saver Storage Tanks



Photo is of
BST-120R5

The Commercial Storage Tank Models Feature:

- **Applications**—Designed for use with boilers, hot water circulation systems and large dump volume applications.
- **Bare Steel Tank**—Heavy gauge steel painted with an environmentally safe, water base, rust and corrosion resistant red oxide color.
- **Vitraglas[®] Lining**—Bradford White tanks are lined with a exclusively engineered enamel formula that provides superior protection from the highly corrosive effects of hot water. This formula (Vitraglas[®]) is fused to the steel surface by firing at a temperature of over 1600°F.
- **Water Connections**—2" NPT factory installed true dielectric fittings extend water heater life and eases installation (BST-200R5A has 2½" connections).
- **Rear Connection**—2" NPT spud allows for a rear water connection (BST-120R5 only).
- **Hand Hole Cleanout**—For removal of accumulated lime and sediment (BST-120R5 has optional hand hole cleanout).
- **Two Protective Magnesium Anode Rods**—Provide added protection against corrosion for long trouble-free service.
- **T&P Relief Valve Opening (T&P Not Supplied)**—All models have special tapping on side of tank.
- **ASME Construction Available**—BST-200R5A only.
- **3/4" NPT Aquastat Fitting.**
- **Brass Drain Valve**—Tamper Proof.



5-Year Limited Tank Warranties / 1-Year Limited Warranty on Component Parts.

For more information on warranty, please visit www.bradfordwhite.com

For products installed in USA, Canada and Puerto Rico. Some states do not allow limitations on warranties. See complete copy of the warranty included with the heater.

Commercial Storage Tanks


Bare Unjacketed Energy Saver Models

Meet or exceed ASHRAE 90.1b (current standard)

| Model Number | Capacity | | A Floor to Heater Top | B Jacket Dia. | C Floor to T&P Conn. | D Floor to Hot Water Conn. | E Floor to Aquastat & Top Circ. Conn. | F Floor to Bottom Circ. Conn. | G Floor to Drain | H Floor to Hand Hole Cleanout | J Floor to Rear Water Conn. | Water Conn. Size. † | Approx. Shipping Weight |
|--------------|-----------|-----------|--------------------------------|---------------|---------------------------------|--------------------------------|---------------------------------------|---------------------------------|--------------------------------|---------------------------------|-----------------------------|-----------------------------------|-------------------------|
| | U.S. Gal. | Imp. Gal. | in. | in. | in. | in. | in. | in. | in. | in. | in. | in. | lbs. |
| BST-80R5 | 80 | 67 | 58 ¹ / ₄ | 20 | 52 ¹ / ₂ | 58 | 13 ¹³ / ₁₆ | 8 ¹³ / ₁₆ | 4 ⁵ / ₁₆ | 6 ¹³ / ₁₆ | — | 2(F) | 182 |
| BST-120R5 | 119 | 100 | 62 ¹ / ₄ | 24 | 54 ⁵ / ₁₆ | 62 ¹ / ₄ | 14 | 9 | 4 ¹ / ₂ | — | 9 | 2(F), 2(R) | 302 |
| BST-200R5A* | 200 | 167 | 76 ¹ / ₂ | 28 | 65 ³ / ₄ | 76 ¹ / ₂ | 16 | 11 | 6 ¹ / ₂ | 9 | — | 2 ¹ / ₂ (F) | 531 |

| Model Number | Capacity | | A Floor to Heater Top | B Jacket Dia. | C Floor to T&P Conn. | D Floor to Hot Water Conn. | E Floor to Aquastat & Top Circ. Conn. | F Floor to Bottom Circ. Conn. | G Floor to Drain | H Floor to Hand Hole Cleanout | J Floor to Rear Water Conn. | Water Conn. Size. † | Approx. Shipping Weight |
|--------------|----------|------|-----------------------|---------------|----------------------|----------------------------|---------------------------------------|-------------------------------|------------------|-------------------------------|-----------------------------|---------------------|-------------------------|
| | Liters | mm. | mm. | mm. | mm. | mm. | mm. | mm. | mm. | mm. | mm. | mm. | kg. |
| BST-80R5 | 303 | 1492 | 508 | 508 | 1334 | 1518 | 362 | 229 | 121 | 184 | — | 51(F) | 82 |
| BST-120R5 | 450 | 1588 | 610 | 610 | 1416 | 1613 | 368 | 229 | 127 | — | 235 | 51(F), 51(R) | 136 |
| BST-200R5A* | 751 | 1956 | 711 | 711 | 1676 | 1981 | 413 | 279 | 171 | 235 | — | 64(F) | 240 |

*Meets American Society of Mechanical Engineers (ASME) Code.
 †F=Front Water Connections. R= Rear Water Connections.

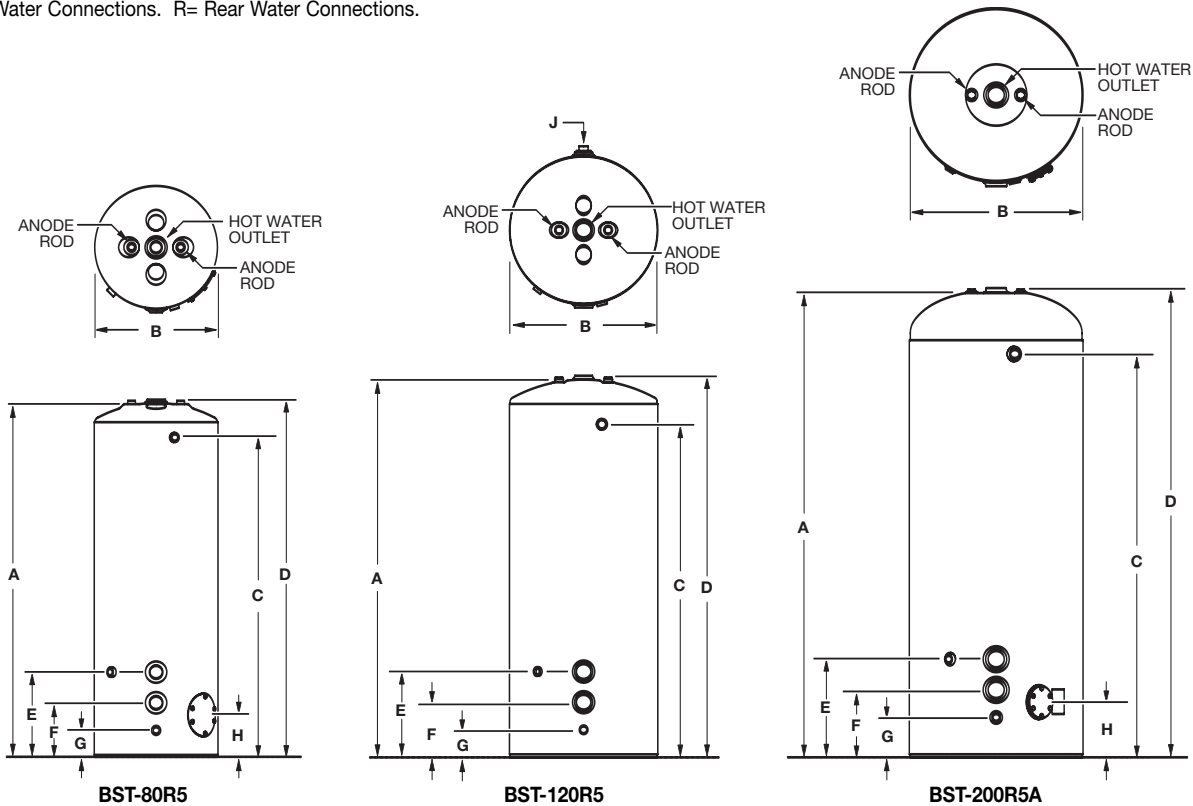

General

Water connections 2" (51mm) NPT (except where noted). T&P tapping 1" (25mm) NPT. Aquastat tapping 3/4" (19mm) NPT.
 All models certified at 300 psi test pressure (2068 kPa) and 150 psi working pressure (1034 kPa).

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.



Ambler, PA

For U.S. and Canada field service, contact your professional installer or local Bradford White sales representative.

Sales 800-523-2931 • Fax 215-641-1670 / Technical Support 800-334-3393 • Fax 269-795-1089 • Warranty 800-531-2111 • Fax 269-795-1089

International: Telephone 215-641-9400 • Telefax 215-641-9750 / www.bradfordwhite.com



BRADFORD WHITE-CANADA INC. Sales / Technical Support 866-690-0961 / 905-238-0100 • Fax 905-238-0105 / www.bradfordwhite.com

Built to be the Best™

©2009, Bradford White Corporation. All rights reserved.